

# MLS IP54 mirror luminaire

Increasing the beam with new lighting technology

- Flicker-free: <5% (bis 400 Hz)
- Efficient: 138 lm/W
- For objects with increased hygienic demands
- LED assembly replaceable
- · Harmonized with the tile and mirror dimensions

MLS/1200













Easy to clean and

prismatics

robust: housing and



















### Lighting solution for:

Next rooms, hospital, care facilities, patient rooms, changing rooms, corridors, staircase, waiting areas, sanitary rooms



Easy to install: Housing profile with concealed cable duct



#### Mounting:

- Surface\*, wall mounting
- Horizontal and vertical
- Mounted in/on furniture

#### Housing:


· Housing made of anodised extruded aluminium profile, white end faces made of polycarbonate

## Lighting technology MLS:


- Diffuser satined with internal longitudinal prismatic,
- Lighting characteristic direct/indirect distribution, 80/20%
- Suitable for VDU workstations, 65°< 3000 cd/m<sup>2</sup>

#### Lamp:

- LED 50000h L80/B10 (Ta -10° to +35°C)
- CRI ≥ 80 / 3000K, 4000K





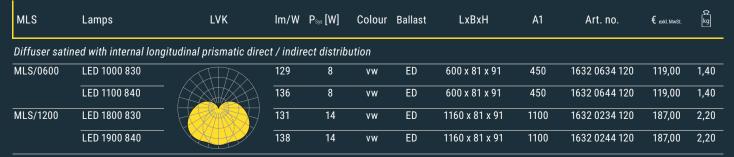













info@regiolux.de www.regiolux.de

