

REGIOLUX



zatta

Lightness in the room

zatta – time for you to make a move



A change in strategy? Individuality and flexibility in light planning are valued not only in the retail and logistic sectors. The zatta light raft has a compact and graceful appearance. It develops its tremendous light effect as basic lighting on track systems. The lightness in the room is created by the low installation height. In addition, it leaves a high-quality impression in terms of light technology. Which is why a suspended version is also available. It is based on the know-how gained from our surface luminaires with the efficient and anti-glare Individual.Lens.Optic. We have made the first move.



zatta

Our new format for surface luminaires

- New option – surface luminaire on tracks
- Object areas: general lighting/aisle lighting/retail/logistics
- Extremely flat housing with driver
- Track and suspended mounting
- Excellent surface luminaire with flexible lighting technology
- Efficient, anti-glare lighting technology with Individual.Lens.Optic
- Output levels from 6,100 to 8,000 lumen



zatta + DPSN


The zatta and 3-phase track systems are a great choice when it comes to designing visually attractive lighting concepts. It is ideal as a supplement to accentuated spotlights here. Regiolux has a large selection of practical installation accessories available for an individually designed DPSN track system.



Low installation height

162 lm/W	≥80 CRI	3000 4000 CCT [K]	6100 8000 lm netto	L80 B10 50000h	35° Ta	DALI
-------------	------------	-------------------------	--------------------------	----------------------	-----------	------

Lighting technology*

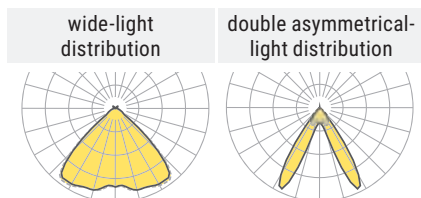

* Other lighting technologies possible

Suspended mounting



Optional:
Noble & black



Please refer to the current data for LED luminaires under www.regiolux.de

*For information about the manufacturer's guarantee for LED luminaires, see http://www.regiolux.de/fi_leadmin/REGIOLUX/Service/Garantie/Warranty_LED_en.pdf

A++
⏻
⚡
⚙️
CE IP 20

Mounting:

- 3-phase track

Housing:

- Sheet steel housing, powder-coated

Lighting technology ZTTAB:

- Individual.Lens.Optic; PMMA plastic
- Lighting characteristic direct wide distribution

Lighting technology ZTTADA:

- Individual.Lens.Optic; PMMA plastic
- Lighting characteristic direct Batwing distribution

Lamp:


- LED 50000h L80/B10
- CRI ≥ 80 / 4000K or CRI ≥ 80 / 3000K

Switching:

- 1 Control gear
- Electronic driver + DALI
- 230V 50Hz



Miscellaneous:

- Track adapter included in scope of delivery
- Black available on request
- DPSN FUNK adapter (3754 5000 205) DT8 EnOcean available as accessory
- Information about further EnOcean components via Dali@regiolux.de

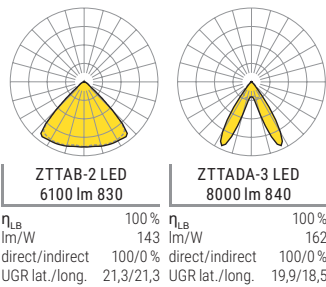

Dimensions

Type	Versions	LxBxH/DxH
ZTT.-2	LED	617 x 119 x 32
ZTT.-3	LED	617 x 175 x 32

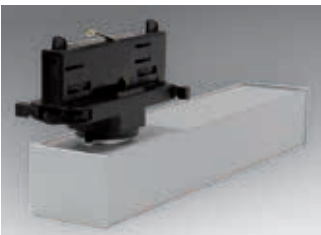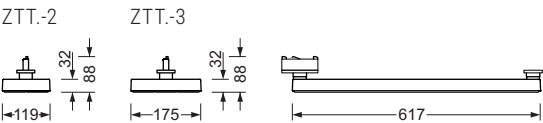

DPSN FUNK adapter



Tool for removal on
DPSN

Accessories

Type	Colour	Material	Details	Item number	kg	
Mounting						
Tool	ZTTA-ERW	vw	St	for zatta for removal on DPSN	4123 9000 100	0,15 1

zatta-ZTTAB-2 LED vw




zatta-ZTTAB-2 LED sg



Products

Type	Lamps	P _{sys} [W]	Colour	Ballast	LxBxH/DxH	Item number		
Individual.Lens.Optic direct wide distribution								
zatta-ZTTAB-2	LED 6100 830	42	vw	ED	617 x 119 x 32	4123 1034 120	2,52	
				DALI	617 x 119 x 32	4123 1036 620	2,62	
			sg	ED	617 x 119 x 32	4123 1034 125	2,52	
				DALI	617 x 119 x 32	4123 1036 625	2,62	
	LED 6500 840	42	vw	ED	617 x 119 x 32	4123 1044 120	2,52	
				DALI	617 x 119 x 32	4123 1046 620	2,62	
			sg	ED	617 x 119 x 32	4123 1044 125	2,52	
				DALI	617 x 119 x 32	4123 1046 625	2,62	
	zatta-ZTTAB-3	LED 7400 830	49	vw	ED	617 x 175 x 32	4123 0014 120	3,22
					DALI	617 x 175 x 32	4123 0016 620	3,33
				sg	ED	617 x 175 x 32	4123 0014 125	3,22
					DALI	617 x 175 x 32	4123 0016 625	3,33
LED 7900 840		49	vw	ED	617 x 175 x 32	4123 0024 120	3,22	
				DALI	617 x 175 x 32	4123 0026 620	3,32	
			sg	ED	617 x 175 x 32	4123 0024 125	3,22	
				DALI	617 x 175 x 32	4123 0026 625	3,32	
Individual.Lens.Optic direct Batwing distribution								
zatta-ZTTADA-2		LED 6200 830	42	vw	ED	617 x 119 x 32	4123 1034 110	2,52
					DALI	617 x 119 x 32	4123 1036 610	2,62
				sg	ED	617 x 119 x 32	4123 1034 115	2,52
	DALI				617 x 119 x 32	4123 1036 615	2,62	
	LED 6600 840	42	vw	ED	617 x 119 x 32	4123 1044 110	2,52	
				DALI	617 x 119 x 32	4123 1046 610	2,62	
			sg	ED	617 x 119 x 32	4123 1044 115	2,52	
				DALI	617 x 119 x 32	4123 1046 615	2,62	
zatta-ZTTADA-3	LED 7500 830	49	vw	ED	617 x 175 x 32	4123 0014 110	3,22	
				DALI	617 x 175 x 32	4123 0016 610	3,33	
			sg	ED	617 x 175 x 32	4123 0014 115	3,22	
				DALI	617 x 175 x 32	4123 0016 615	3,33	
	LED 8000 840	49	vw	ED	617 x 175 x 32	4123 0024 110	3,22	
				DALI	617 x 175 x 32	4123 0026 610	3,32	
			sg	ED	617 x 175 x 32	4123 0024 115	3,22	
				DALI	617 x 175 x 32	4123 0026 615	3,32	



Mounting:

- Suspended

Housing:

- Sheet steel housing, powder-coated

Lighting technology ZTHB:

- Individual.Lens.Optic; PMMA plastic
- Lighting characteristic direct wide distribution

Lighting technology ZTHDA:

- Individual.Lens.Optic; PMMA plastic
- Lighting characteristic direct Batwing distribution

Lamp:


- LED 50000h L80/B10
- CRI ≥ 80 / 4000K or CRI ≥ 80 / 3000K

Switching:

- 1 Control gear
- Electronic driver + DALI
- 230V 50Hz


Miscellaneous:

- Y wire-rope suspension with connection cable and ceiling canopy included in the scope of delivery.
- Black available on request



Dimensions

Type	Versions	LxBxH/DxH	A1
ZTH.-3	LED	617 x 175 x 32	500

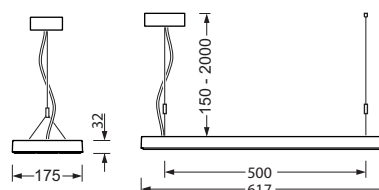

Products

Type	Lamps	P _{Sys} [W]	Colour	Ballast	LxBxH/DxH	Item number	
Individual.Lens.Optic direct wide distribution							
zatta-ZTHB-3	LED 7400 830	49	vw	ED	617 x 175 x 32	4122 0014 120	3,50
				DALI	617 x 175 x 32	4122 0016 620	3,60
			sg	ED	617 x 175 x 32	4122 0014 125	3,50
				DALI	617 x 175 x 32	4122 0016 625	3,60
	LED 7900 840	49	vw	ED	617 x 175 x 32	4122 0024 120	3,50
				DALI	617 x 175 x 32	4122 0026 620	3,60
			sg	ED	617 x 175 x 32	4122 0024 125	3,50
				DALI	617 x 175 x 32	4122 0026 625	3,60
Individual.Lens.Optic direct Batwing distribution							
zatta-ZTHDA-3	LED 7500 830	49	vw	ED	617 x 175 x 32	4122 0014 110	3,50
				DALI	617 x 175 x 32	4122 0016 610	3,60
			sg	ED	617 x 175 x 32	4122 0014 115	3,50
				DALI	617 x 175 x 32	4122 0016 615	3,60
	LED 8000 840	49	vw	ED	617 x 175 x 32	4122 0024 110	3,50
				DALI	617 x 175 x 32	4122 0026 610	3,60
			sg	ED	617 x 175 x 32	4122 0024 115	3,50
				DALI	617 x 175 x 32	4122 0026 615	3,60




Accessories 3 phase track DPSN + DALI

DPSN vw



Phase track IP 20

Aluminium extruding press profile in white (RAL 9010) or aluminium natural anodized, rail can be shortened to any length. Voltage 230V/400 16 A + 2 control cables DALI




Products

Type	Colour	Details	Item number	kg	
DPSN-1000	aen	3~, max. 16A, +DALI, 7-pole, L=1000mm	3764 4100 105	1,10	1
	ws	3~, max. 16A, +DALI, 7-pole, L=1000mm	3764 4100 100	1,10	1
DPSN-2000	aen	3~, max. 16A, +DALI, 7-pole, L=2000mm	3764 4200 105	2,10	1
	ws	3~, max. 16A, +DALI, 7-pole, L=2000mm	3764 4200 100	2,10	1
DPSN-3000	aen	3~, max. 16A, +DALI, 7-pole, L=3000mm	3764 4300 105	3,40	1
	ws	3~, max. 16A, +DALI, 7-pole, L=3000mm	3764 4300 100	3,40	1
DPSN-4000	aen	3~, max. 16A, +DALI, 7-pole, L=4000mm	3764 4400 105	4,50	1
	ws	3~, max. 16A, +DALI, 7-pole, L=4000mm	3764 4400 100	4,50	1


Accessories

Type	Colour	Material	Details	Item number	kg	
DPSN-ESL	sw	PC	Power supply for DPSN, 7-pole, left	3764 4002 104	0,10	1
	ws	PC	Power supply for DPSN, 7-pole, left	3764 4002 100	0,10	1
DPSN-ESR	sw	PC	Power supply for DPSN, 7-pole, right	3764 4001 104	0,10	1
	ws	PC	Power supply for DPSN, 7-pole, right	3764 4001 100	0,10	1

DPSN-ESL/ESR



DPSN-ESM



DPSN-ESM	sw	PC	Power supply for DPSN, 7-pole, center	3764 4003 104	0,19	1
	ws	PC	Power supply for DPSN, 7-pole, center	3764 4003 100	0,19	1

DPSN-KE



DPSN-KE	sw	PC	Rail connector for DPSN, 7-pole, electrical	3764 4004 104	0,05	1
	ws	PC	Rail connector for DPSN, 7-pole, electrical	3764 4004 100	0,05	1


DPSN-KM




DPSN-KM	sw	PC	Rail connector for DPSN, 7-pole, mechanical	3764 4005 104	0,05	1
	ws	PC	Rail connector for DPSN, 7-pole, mechanical	3764 4005 100	0,05	1




DPSN-KF




DPSN-KTIL/KTIR



DPSN-KWA/KWI



DPSN-KX



Type	Colour	Material	Details	Item number	kg	1
DPSN-KF	sw	PC	Multiflex connector for DPSN, 0°-360°, 7-pole, horizontal and vertical	3764 4006 104	0,24	1
	ws	PC	Multiflex connector for DPSN, 0°-360°, 7-pole, horizontal and vertical	3764 4006 100	0,24	1
DPSN-KTIL	sw	PC	Rail connector for DPSN, 7-pole, left inside	3764 4018 104	0,29	1
	ws	PC	Rail connector for DPSN, 7-pole, left inside	3764 4018 100	0,29	1
DPSN-KTIR	sw	PC	Rail connector for DPSN, 7-pole, right inside	3764 4015 104	0,29	1
	ws	PC	Rail connector for DPSN, 7-pole, right inside	3764 4015 100	0,29	1
DPSN-KWA	sw	PC	Rail connector for DPSN, 7-pole, left	3764 4017 104	0,19	1
	ws	PC	Rail connector for DPSN, 7-pole, left	3764 4017 100	0,19	1
DPSN-KWI	sw	PC	Rail connector for DPSN, 7-pole, right	3764 4014 104	0,19	1
	ws	PC	Rail connector for DPSN, 7-pole, right	3764 4014 100	0,19	1
DPSN-KX	sw	PC	Rail connector for DPSN, 7-pole	3764 4019 104	0,38	1
	ws	PC	Rail connector for DPSN, 7-pole	3764 4019 100	0,38	1

Accessories 3 phase track DPSN + DALI

DPSN-ADA



DPSN-AET



DPSN-EK




DPSN-DB



DPSN-AK



DPSN-SV



Type	Colour	Material	Details	Item number		
DPSN-ADA	ws	PC	DPSN-DALI-adapter, 5-pole	3764 4022 100	0,06	1

DPSN-AET	ws	PC	DPSN-ET-adapter, 3-pole	3764 4023 100	0,04	1
----------	----	----	-------------------------	---------------	------	---

DPSN-EK	sw	Polymer	End cap for DPSN	3764 4007 104	0,01	1
	ws	Polymer	End cap for DPSN	3764 4007 100	0,01	1

DPSN-DB	sg	Al	Ceiling mounting for DPSN	3764 4008 105	0,02	1
---------	----	----	---------------------------	---------------	------	---

DPSN-AK	sg	Al	Suspension clamp for DPSN	3764 4011 105	0,02	1
---------	----	----	---------------------------	---------------	------	---


DPSN-SV	sg	Al	Rail connector for DPSN	3764 4012 105	0,03	1
---------	----	----	-------------------------	---------------	------	---




Type	Colour	Material	Details	Item number		
DPSN-TSB	ws	Al	Mounting rail attachment for DPSN	3764 4020 100	0,01	1



DPSN-DH	sg	St	Ceiling hook for DPSN	3764 4021 105	0,01	1
	ws	St	Ceiling hook for DPSN	3764 4021 100	0,01	1



DPSN-CS	sg	Mix	Wire suspension for DPSN, up to 15kg, L=100mm-5200mm	3764 4009 115	0,04	1
---------	----	-----	--	---------------	------	---



DPSN-LBW	sw	Steel	Conductor cutting tool for DPSN	3764 4010 100	0,10	1
----------	----	-------	---------------------------------	---------------	------	---

- ① Phase track DPSN
- ② Power supply DPSN-ESL/ESR
- ③ Center power supply DPSN-ESM
- ④ Rail connector electrical DPSN-KE
- ⑤ Multiflex connector DPSN-KF
- ⑥ Rail connector DPSN-KTIL/KTIR
- ⑦ Rail connector DPSN-KWA/KWI
- ⑧ Rail connector DPSN-KX
- ⑨ End cap DPSN-EK

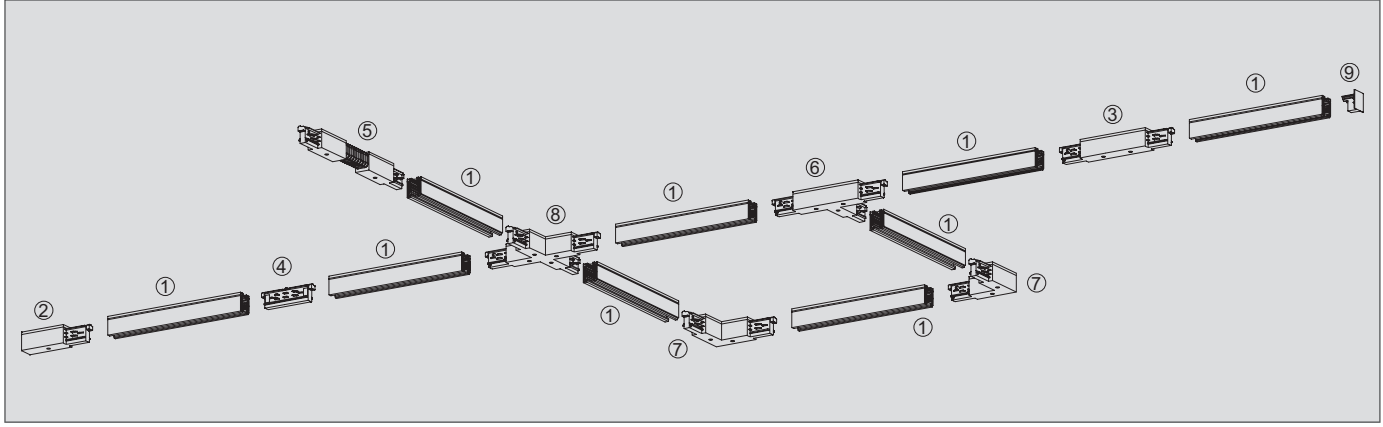


Photo index

Page	1	nadtytok · shutterstock.com
	2/3	Gemini Create · shutterstock.com
	7	Gina Sanders · fotolia.com
	9	Michael Meschede, Kaufungen · Herkules Markt Witzenhausen

Regiolux



REGIOLUX

Regiolux GmbH
Hellinger Straße 3
D 97486 Königsberg
T +49 9525 89 0
F +49 9525 89 7
info@regiolux.de
www.regiolux.de